



現地発生材利用 丸太筋工施工標準図

[平面図]

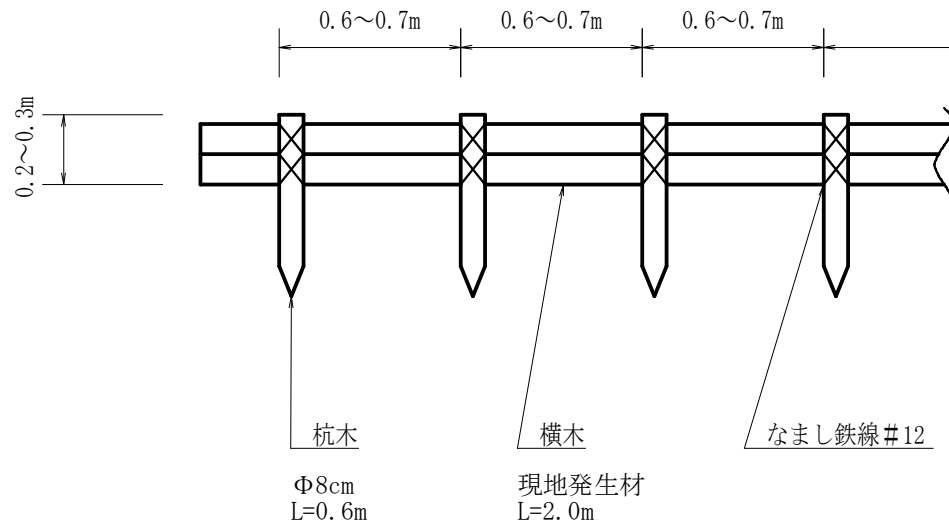

[側面図]

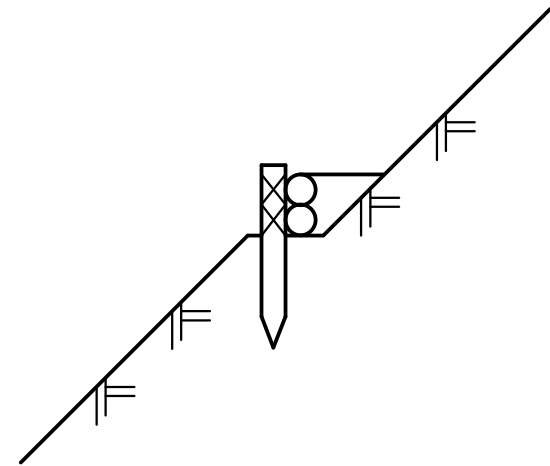

測 量 図

工事名：令和5年度 予防治山事業

箇所名：大津市坂本本町

所在地：大津市坂本本町

氏名：

補正方法：コンパス法

面積：25173.418 m²


縮尺：1 / 5000

測量方式：前進法

作成日： / /

閉合比：0.34 %

閉合誤差：6.268 m

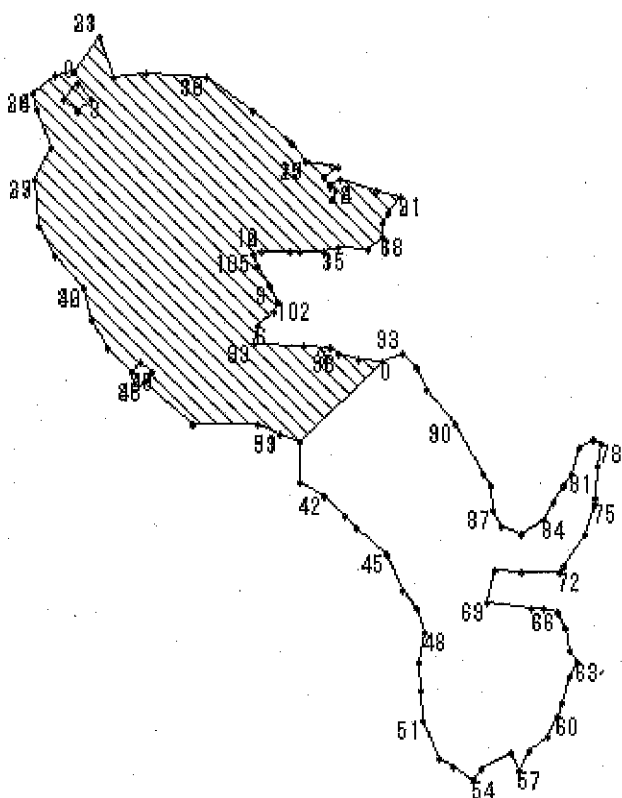

No	測点名称	方位	角度	斜距離	水平距離	X座標	Y座標
1	sp-1	92.0	1.0	18.760	18.757	-0.593	18.762
2	1-2	86.0	-7.0	6.560	6.511	-0.117	25.263
3	2-3	88.0	2.0	15.380	15.371	0.469	40.638
4	3-4	80.0	20.0	10.140	9.528	2.156	50.029
5	4-5	92.0	1.0	20.660	20.657	1.503	70.691
6	5-6	49.0	4.0	11.050	11.023	8.772	79.020
7	6-7	0.0	-9.0	9.390	9.274	18.076	79.028
8	7-8	32.0	-9.0	8.630	8.524	25.333	83.552
9	8-9	40.0	3.0	12.740	12.723	35.121	91.741
10	9-10	285.0	30.0	19.660	17.026	39.585	75.310
11	10-11	289.0	24.0	26.930	24.602	47.676	52.069
12	11-12	240.0	-3.0	8.590	8.578	43.415	44.648
13	12-13	325.0	0.0	6.850	6.850	49.049	40.725
14	13-14	56.0	-2.0	11.150	11.143	55.317	49.972
15	14-15	281.0	20.0	23.230	21.829	59.554	28.563

No	测点名称	方位	角度	斜距離	水平距離	X座標	Y座標
16	15-16	322.0	12.0	15.500	15.161	71.551	19.242
17	16-17	310.0	6.0	32.670	32.491	92.543	-5.619
18	17-18	306.0	7.0	37.490	37.211	114.538	-35.691
19	18-19	274.0	15.0	41.100	39.700	117.439	-75.260
20	19-20	264.0	27.0	24.400	21.741	115.237	-96.863
21	20-21	341.0	16.0	28.880	27.761	141.578	-105.877
22	21-22	218.0	3.0	28.630	28.591	119.143	-123.454
23	22-23	259.0	-10.0	12.160	11.975	116.897	-135.199
24	23-24	230.0	-2.0	19.330	19.318	104.544	-149.980
25	24-25	163.0	-28.0	12.800	11.302	93.773	-146.666
26	25-26	159.0	8.0	26.740	26.480	69.140	-137.153
27	26-27	208.0	-8.0	23.960	23.727	48.268	-148.272
28	27-28	175.0	-14.0	32.150	31.195	17.296	-145.526
29	28-29	152.0	-8.0	22.870	22.647	-2.626	-134.874
30	29-30	139.0	-6.0	28.760	28.602	-24.117	-116.084
31	30-31	166.0	-14.0	22.810	22.132	-45.519	-110.711
32	31-32	151.0	-2.0	21.110	21.097	-63.901	-100.465
33	32-33	136.0	-5.0	22.050	21.966	-79.630	-85.187
34	33-34	43.0	0.0	9.410	9.410	-72.717	-78.761
35	34-35	134.0	-3.0	10.330	10.316	-79.848	-71.331
36	35-36	226.0	8.0	8.080	8.001	-85.380	-77.079
37	36-37	131.0	-2.0	43.020	42.994	-113.445	-44.594
38	37-38	90.0	-13.0	43.670	42.551	-113.304	-2.006
39	38-39	118.0	-14.0	15.810	15.340	-120.456	11.552
40	39-40	112.0	-15.0	15.730	15.194	-126.097	25.653
41	40-41	181.0	-11.0	26.810	26.317	-152.323	25.216
42	41-42	120.0	-15.0	19.560	18.894	-161.708	41.596
43	42-43	135.0	-24.0	20.240	18.490	-174.721	54.686
44	43-44	136.0	-26.0	12.660	11.379	-182.868	62.601
45	44-45	132.0	-10.0	25.730	25.339	-199.739	81.454
46	45-46	155.0	-2.0	26.490	26.474	-223.646	92.665
47	46-47	143.0	-15.0	15.600	15.068	-235.630	101.746
48	47-53.14	162.0	-20.0	17.390	16.341	-251.117	106.810
49	53.14-53.13	190.0	-14.0	20.820	20.202	-270.945	103.319
50	53.13-53.12	177.0	-20.0	20.190	18.972	-289.829	104.329
51	53.12-53.11	176.0	-22.0	20.940	19.415	-309.133	105.700
52	53.11-53.10	157.0	-12.0	29.130	28.493	-335.266	116.857
53	53.10-53.9	115.0	-34.0	12.480	10.346	-339.604	126.243
54	53.9-53.8	126.0	-39.0	20.150	15.659	-348.756	138.925
55	53.8-53.7	35.0	0.0	9.240	9.240	-341.157	144.233
56	53.7-53.6	64.0	-1.0	22.180	22.177	-331.362	164.185
57	53.6-53.5	157.0	-27.0	13.620	12.136	-342.492	168.937
58	53.5-53.4	31.0	10.0	14.910	14.683	-329.858	176.512
59	53.4-53.3	48.0	1.0	15.170	15.168	-319.659	187.797
60	53.3-53.2	27.0	0.0	13.990	13.990	-307.148	194.160
61	53.2-53.1	15.0	6.0	9.500	9.448	-297.990	196.614
62	53.1-53	17.0	5.0	18.730	18.659	-280.085	202.085
63	53-54	32.0	-5.0	10.210	10.171	-271.426	207.484
64	54-55	327.0	26.0	10.770	9.680	-263.276	202.220
65	55-56	351.0	-2.0	14.580	14.571	-248.836	199.954
66	56-57	333.0	5.0	12.150	12.104	-238.011	194.469
67	57-58	285.0	33.0	12.010	10.072	-235.371	184.749
68	58-59	271.0	23.0	7.490	6.895	-235.228	177.861
69	59-60	278.0	2.0	29.750	29.732	-230.992	148.444
70	60-61	12.0	4.0	21.100	21.049	-210.333	152.838
71	61-62	93.0	-6.0	17.620	17.523	-211.192	170.352
72	62-63	90.0	-12.0	25.390	24.835	-211.110	195.208
73	63-64	41.0	24.0	5.740	5.244	-207.135	198.653
74	64-65	36.0	5.0	24.680	24.586	-187.163	213.125
75	65-66	18.0	2.0	21.400	21.387	-166.753	219.753
76	66-67	354.0	31.0	5.260	4.509	-162.254	219.286
77	67-68	5.0	3.0	21.300	21.271	-140.994	221.158
78	68-69	7.0	1.0	14.330	14.328	-126.725	222.917
79	69-70	294.0	28.0	6.490	5.730	-124.375	217.686
80	70-71	238.0	26.0	11.810	10.615	-129.965	208.694

No	測点名称	方位	角度	斜距離	水平距離	X座標	Y座標
81	71-72	196.0	-2.0	17.070	17.060	-146.308	204.006
82	72-73	211.0	1.0	10.090	10.088	-154.921	198.819
83	73-74	215.0	3.0	12.950	12.932	-165.472	191.413
84	74-75	207.0	-5.0	13.660	13.608	-177.552	185.247
85	75-76	238.0	-1.0	17.550	17.547	-186.792	170.381
86	76-77	295.0	8.0	14.080	13.943	-180.853	157.756
87	77-78	335.0	13.0	12.150	11.839	-170.084	152.764
88	78-79	352.0	10.0	15.570	15.333	-154.849	150.643
89	79-80	328.0	2.0	8.930	8.925	-147.250	145.921
90	80-81	330.0	1.0	38.720	38.714	-113.595	126.597
91	81-82	321.0	3.0	28.260	28.221	-91.570	108.862
92	82-83	332.0	2.0	16.180	16.170	-77.240	101.285
93	83-84	318.0	-7.0	14.050	13.945	-66.831	91.966
94	84-85	243.0	3.0	14.370	14.350	-73.298	79.192
95	85-86	278.0	23.0	16.650	15.326	-71.115	64.029
96	86-87	283.0	10.0	14.230	14.014	-67.916	50.386
97	87-88	307.0	8.0	6.470	6.407	-64.039	45.274
98	88-89	276.0	1.0	17.540	17.537	-62.148	27.848
99	89-90	272.0	7.0	33.080	32.833	-60.894	-4.936
100	90-91	13.0	-10.0	12.250	12.064	-49.099	-2.212
101	91-92	48.0	5.0	13.490	13.439	-40.062	7.787
102	92-93	22.0	14.0	7.630	7.403	-33.174	10.566
103	93-94	336.0	-12.0	12.010	11.748	-22.403	5.798
104	94-95	325.0	-10.0	15.850	15.609	-9.565	-3.141
105	95-96	343.0	-10.0	9.240	9.100	-0.833	-5.794
106	96-97	82.0	2.0	5.850	5.846	0.000	0.000
	区分：外周						
	工事名：令和5年度 予防治山事業						
	箇所名：大津市坂本本町						
	所在地：大津市坂本本町						
	氏名：						
	作成日： / /						
	測量方法：前進法						
	補正方式：コンパス法						
	閉合誤差：6.268 m						
	閉合比：0.34 %						
	面積：60661.839 m2						
	外周延長（補正後水平距離）：1834.476 m						
1	bsp~b1	224.0	7.0	14.480	14.372	-10.338	-9.984
2	b1~b2	128.0	-5.0	13.060	13.010	-18.348	0.268
3	b2~b3	43.0	-5.0	12.130	12.084	-9.510	8.509
4	b3~bsp	319.0	0.0	12.860	12.860	0.196	0.072
	区分：除地						
	工事名：令和4年度 第101-1号 森林調査等業務委託						
	箇所名：						
	所在地：大津市坂本本町大津市坂本本町						
	氏名：有限会社坂東林業						
	作成日：2022/08/02						
	測量方法：前進法						
	補正方式：補正なし						
	閉合誤差：0.209 m						
	閉合比：0.40 %						
	-						
	外周延長（補正後水平距離）：52.327 m						
1		278.2	23.0	16.644	15.320	-71.115	64.029
2		283.2	10.0	14.229	14.013	-67.916	50.386
3		307.2	8.0	6.478	6.416	-64.039	45.274
4		276.2	1.0	17.531	17.528	-62.148	27.848
5		272.2	7.0	33.055	32.809	-60.894	-4.936
6		13.0	-10.0	12.291	12.105	-49.099	-2.212
7		47.9	5.0	13.528	13.477	-40.062	7.787
8		22.0	14.0	7.654	7.428	-33.174	10.566
9		336.1	-12.0	12.041	11.779	-22.403	5.798
10		325.1	-10.0	15.884	15.643	-9.565	-3.141
11		343.1	-10.0	9.266	9.126	-0.833	-5.794

